



H10FN2 Fiber Optic Transceivers

Specification


H10FN2

1. Features



- One Neutrik opticalCON DUO interface, compatible with LC-LC interface, with transmission speeds up to 10Gb/s
- 10 Neutrik RJ45 Ethernet ports, up to 1Gb/s per channel
- 10km transmission distance
- Hot-pluggable
- Single mode twin-core fiber (TCF)

2. Interface Description

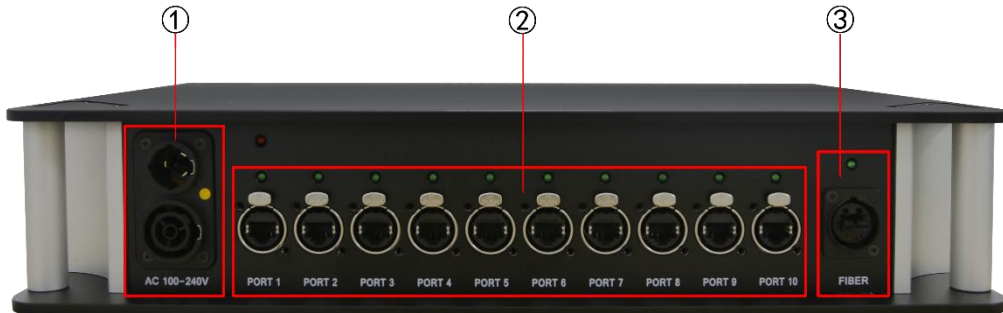


NO.	Interface	Description
1	Power	Neutrik powerCON TRUE1 power supply interface, AC power supply, power supply loop
2	Ethernet Port	Neutrik RJ45 Ethernet port
3	Fiber Optical Interface	Neutrik opticalCON DUO interface, compatible with LC-LC interface

3. Parameters Description

Operating Temperature	0 ~ 70 °C
Power	AC 100~240V
Data Rate	10Gb/s
Working Mode	Single-Mode
Transmission Distance	10km

4. Diagrams

Used in conjunction with the Z6 PRO

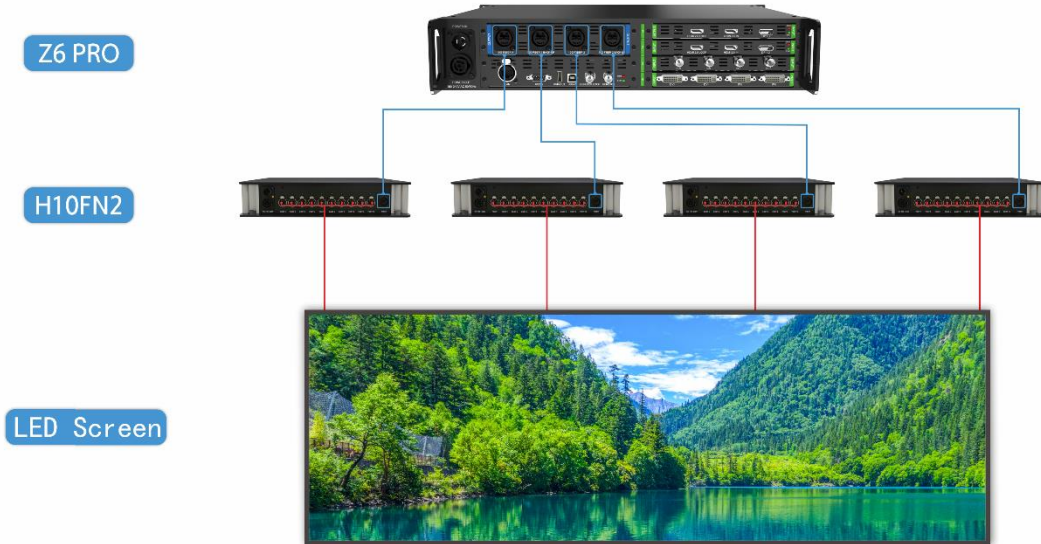

5. Product Dimension

Unit: mm

